



Fornecimento do primeiro nível (identificado em baixo como Nivel1) de um sistema de transporte composto por dois conveyors modulares. Estes conveyors terão que permitir o encaixe fácil à posterior de no máximo 4 níveis, conforme ilustrado na figura em baixo. A Espessura máxima de cada conveyor 100mm. O peso máximo a transportar pelo conveyor do nível 1 é de 164Kg, distribuidos pelo seu comprimento total. A velocidade deverá poder ser controlada de 0 até 0.5m/s e independentemente em cada um dos conveyors.

Nivel 1: 3000mm + 3000mm (distancia máxima ao chão 5cm)

Nivel 2: 3000mm + 2700mm

Nivel 3: 3000mm + 2400mm

Nivel 4: 3000mm + 2100mm

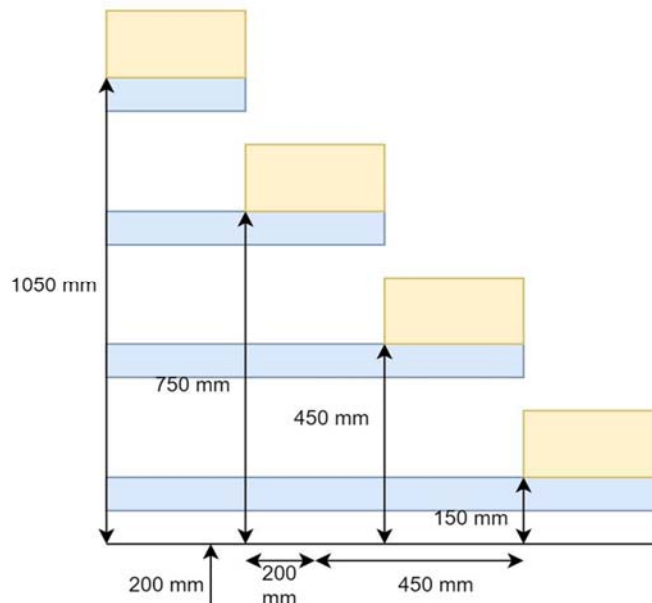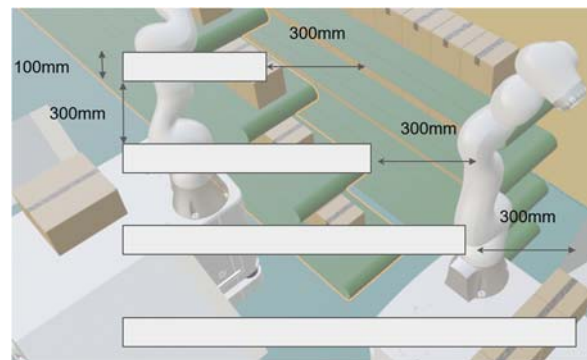

Provision of the first level (identified as “Level1”) of a conveyor system consisting of two modular conveyors. These conveyors must allow easy rear fitting of a maximum of 4 levels, as shown in the figure below. The Maximum thickness of each conveyor must be 100mm. The maximum weight to be transported by the “Level 1” conveyor is 164Kg, distributed over its total length. The speed must be controllable from 0 to 0.5m/s independently for each conveyor.

Level 1: 3000mm + 3000mm (maximum distance to floor 5cm)

Level 2: 3000mm + 2700mm

Level 3: 3000mm + 2400mm

Level 4: 3000mm + 2100mm

